

**ONE  
BOND**  
SAINT-GOBAIN

Transforming  
surfaces  
...and beyond



BUILDING MATERIALS  
ADHESIVES AND SEALANTS

FOR BONDS THAT LAST.

  
SAINT-GOBAIN

# ONE BOND

SAINT-GOBAIN



Silicone Sealants  
Page 4



Polyurethane Sealants  
Page 16



Instant bond Adhesives  
(Cyanoacrylates)  
Page 29

Acrylic Sealants  
Page 10



MS-Hybrid Adhesives  
Page 22



Applicator Guns  
Page 32



# ONEBOND ADHESIVES AND SEALANTS

## FOR BONDS THAT LAST.

Welcome to the exciting world of OneBond adhesives and sealants from Saint-Gobain Surface Solutions. As a world-leading supplier to maintenance, repair and assembly customers, it's our mission to deliver performance-based sustainable solutions to effectively help build and restore your equipment, **whilst saving you time, effort and cost.**

OneBond adhesives and sealants are specifically designed to be safe, efficient, application-focused and easy-to-use in the wide range of Building Materials operations you face every day. And this is just the start; our ongoing commitment to innovation means we are continually developing new results-based products **to make your life easier.**

### Saint-Gobain Surface Solutions

With our unchallenged investment in R&D, we work with our customers and users to deliver performance-based sustainable solutions. We transform your surfaces using a combination of abrasives, adhesives, sealants, and composites. Our unquestionable expertise spreads equal across Industry, Automotive Repair, Building/Construction and Trade/DIY, with over 81 manufacturing facilities in 32 countries.

# SILICONE SEALANTS


French scientist, Charles Friedel, and American scientist, James Crafts synthesised the first compound with carbon-silicon bonds.

English scientist, Frederick S. Kipping, prepared a broad family of organosilicon compounds and coined the name "silicones".

American scientist, Eugene G. Rochow, and German scientist, Richard Müller, synthesised the first family of chlorosilanes that are still used as precursors to manufacture silicone sealants.

The first alkoxy cure, medium modulus silicone was introduced. The product exhibited an acceptable joint movement capability.

Specialty silicones were commercialised, including heat stabilised silicones (>250°C), suitable for indirect food contact, primer adhesion to multiple substrates, etc.

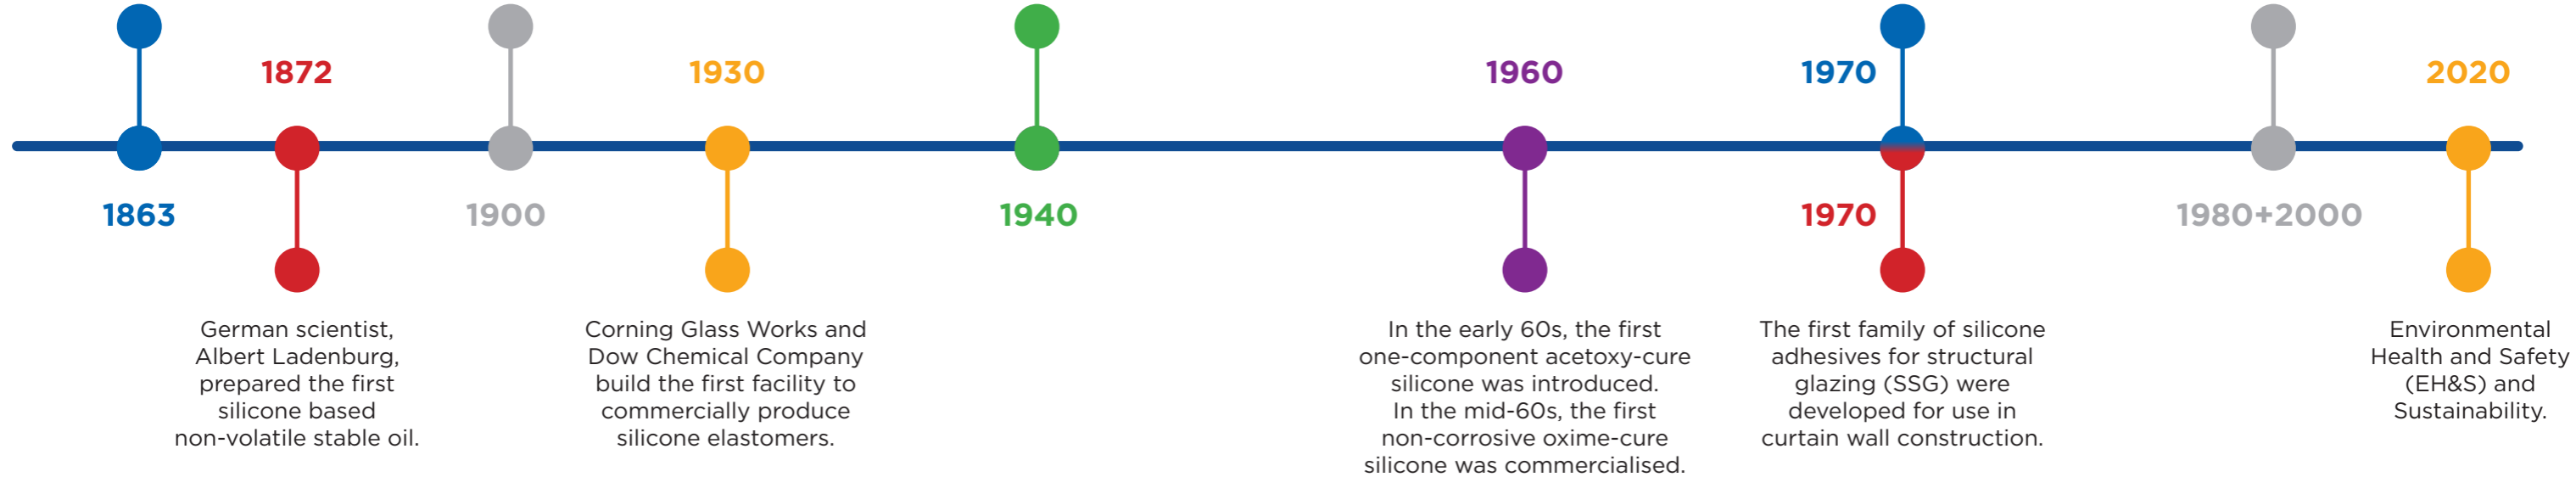



OneBond Silicone Multi-Purpose is a one-component acetoxysilane sealant, suitable for sealing window frames (interior), kitchen backsplashes and countertops, etc. Bonds well to glass, ceramics, and metals resistant to corrosion. Not suitable for porous substrates used in construction such as concrete, marble, etc.

PRODUCT HIGHLIGHTS

- Gun grade: very easy to apply and tool
- Application temperature: 5°C - 40°C
- Contains solvents: loss of volume 40%
- Tack free time: 10 - 15 min
- Curing through volume (24 hours): 2 mm @25°C/50%RH
- High resistance to mould and bacteria
- Resistant to common cleaning products
- It is an acetoxysilane sealant: it may release vinegar odour while curing.
- It cannot be painted
- Shelf life of 12 months when stored in original containers at 5°C - 25°C



Product type	Size (ml/g)	Box Qty (pcs)	Colour	SAP	Languages on packaging
Multi-purpose silicone	280 ml	12	Transparent	63642597424	EN, IT, ES, PT, TK, NL, FR, DE, PL
	280 ml	12	White	63642597425	EN, IT, ES, PT, TK, NL, FR, DE, PL



OneBond Silicone Construction is a one-component, non-corrosive oxime MEKO-free silicone sealant for indoor and outdoor use. It exhibits an outstanding adhesion on main building materials such as glass, ceramics, steel, aluminium, brick, concrete, wood and most plastics.

PRODUCT HIGHLIGHTS

- Gun grade: very easy to apply and tool
- Application temperature: 5°C - 40°C
- High solids content (85% - 95%): low volume loss
- Tack free time: 5 - 10 min
- Curing through volume (24 hours): 2,5 mm @25°C/50%RH
- Outstanding durability
- Resistant to ozone, UV, humidity and high temperatures
- Can withstand peak temperatures of up to +150°C
- It cannot be painted
- Shelf life of 12 months when stored in original containers at 5°C - 25°C



Product type	Size (ml/g)	Box Qty (pcs)	Colour	SAP	Languages on packaging
Construction silicone	300 ml	12	Transparent	63642597422	EN, IT, ES, PT, TK, NL, FR, DE, PL
	300 ml	12	White	63642597423	EN, IT, ES, PT, TK, NL, FR, DE, PL



OneBond Silicone Sanitary is a one-component, solvent-free acetoxysilant for sealing bath and kitchen sinks, shower trays, bathtubs, ceramic tiling, etc.

PRODUCT HIGHLIGHTS

- Gun grade: very easy to apply and tool
- Application temperature: 5°C - 40°C
- 100% silicone polymer (solvent-free)
- Can be applied in vertical and overhead joints
- Tack free time: 15 - 20 min
- Curing through volume (24 hours): 3 mm @25°C/50%RH
- Resistant to mould and bacteria
- Resistant to common cleaning products
- It is an acetoxysilant: it may release vinegar odour while curing
- It cannot be painted
- Shelf life of 12 months when stored in original containers at 5°C - 25°C



Product type	Size (ml/g)	Box Qty (pcs)	Colour	SAP	Languages on packaging
Sanitary Silicone	280 ml	12	Transparent	63642597427	EN, IT, ES, PT, TK, NL, FR, DE, PL
	280 ml	12	White	63642597428	EN, IT, ES, PT, TK, NL, FR, DE, PL

PROPERTIES



KEY FEATURES

	OneBond Sanitary	OneBond Multi-Purpose	OneBond Construction
Colour	White, Transparent	White, Transparent	White, Transparent
Type	Acetoxysilant	Acetoxysilant	Neutral Oxime Meko-Free
Labeling	Non-toxic	Non-toxic	Non-toxic
Tack-free time +25°C / 50% RH	15-20 minutes	10-15 minutes	5-10 minutes
Tooled, brushed within the Tack-free time	Yes	Yes	Yes
Curing through volume +25°C / 50% RH	3 mm / 24 hours	2 mm / 24 hours	2,5 mm / 24 hours
Mould resistant	Premium	Premium	Yes
Exterior applications	No	No	Yes
Corrosive	Yes	Yes	No, neutral
Bonds to concrete	No	No	Yes

CERTIFICATIONS



OneBond Sanitary		OneBond Multi-Purpose		OneBond Construction	
Transparent	White	Transparent	White	Transparent	White

CE EN 15651-1:2012  
F-INT-EXT-CC  
EN 15651-2:G-CC  
EN 15651-3:S




CE EN 15651-1:2012  
F-INT-EXT-CC  
EN 15651-2:G-CC  
EN 15651-3:S



CE EN 15651-1:2012  
F-INT-EXT-CC-25LM



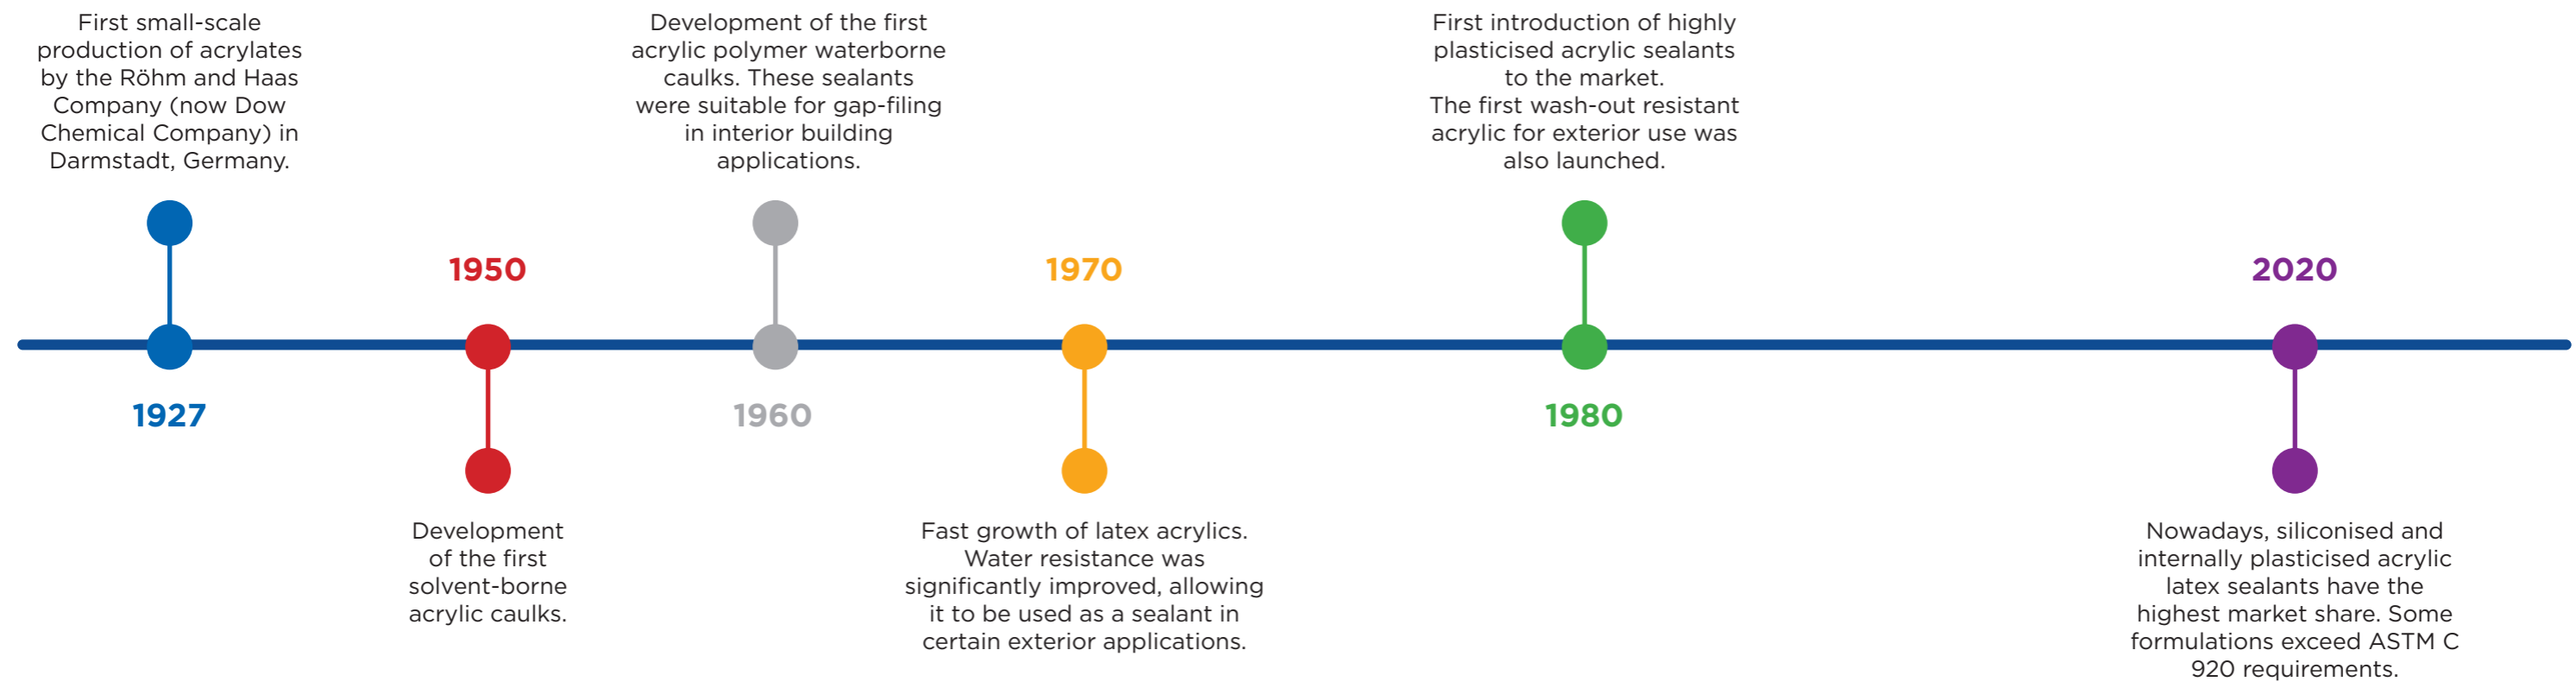



## ACRYLIC EXTERIOR

OneBond Acrylic Exterior is a non-toxic, one-part acrylic sealant recommended for exterior applications. Adheres to wood, PVC, iron, aluminium, stone, concrete, plaster and brick works. Can be used for sealing flanged window/door frames as well as masonry, exposed joints on metal sidings, skylights, HVAC ducts, roof panel assemblies, etc.

### PRODUCT HIGHLIGHTS

- Gun grade: very easy to apply and tool
- Application temperature: 5°C - 35°C
- Tack free time: 15 - 45 min
- Curing through volume (24 hours): 2 mm @25°C/50%RH
- Painting time: 24 h
- Loss of volume: 30%
- Resistant to weather conditions
- Forms a permanently water repellent layer after curing
- Remains flexible for a long time after curing
- Shelf life of 12 months when stored in original containers at 5°C - 25°C

EASY WATER  
CLEANUP



HIGHLY  
FLEXIBLE



FOR POROUS AND  
NON-POROUS  
SURFACES



WATERPROOF  
SEAL



PAINTABLE



LOW  
ODOR



Product type	Size (ml/g)	Box Qty (pcs)	Colour	SAP	Languages on packaging
Acrylic sealant	280 ml	12	White	63642597411	EN, IT, ES, PT, TK, NL, FR, DE, PL



## ACRYLIC EASY NAIL

OneBond Acrylic Easy Nail is a non-toxic, one-part acrylic adhesive, with an initial tack. Adheres to metal, glass, plastic, wood, concrete, composite panels, and kitchen accessories. For fixing panels, ornamental framework (e.g.: cornices), skirting boards, as well as masonry, plasterboard, wood, etc

SANDABLE



HEAT  
RESISTANT



PAINTABLE



### PRODUCT HIGHLIGHTS

- Low strength: non-structural
- Gun grade: very easy to apply and tool
- Application temperature: 5°C - 35°C
- Easy water clean-up
- Tack free time: 30 - 60 min
- Curing through volume (24 hours): 2 mm @25°C/50%RH
- Temperature resistance: -10°C - +80°C
- Primerless to the main construction materials
- Not to be used on bituminous substrates, natural rubber, etc.
- Shelf life of 12 months when stored in original containers at 5°C - 25°C

Product type	Size (ml/g)	Box Qty (pcs)	Colour	SAP	Languages on packaging
Acrylic adhesive	280 ml	12	White	63642597412	EN, IT, ES, PT, TK, NL, FR, DE, PL



## ACRYLIC UNIVERSAL

OneBond Acrylic Universal is a non-toxic, one-part acrylic based sealant suitable for sealing cracks, assembly of joinery, sealing of household joints, such as stairs, wooden floor boards, etc. Not suitable for joints exposed to continuous water immersion or joints which are totally closed (water evaporation).

SANDABLE



HEAT  
RESISTANT



PAINTABLE



### PRODUCT HIGHLIGHTS

- Gun grade: very easy to apply and tool
- Application temperature: 5°C - 35°C
- Tack free time: 25 - 60 min
- Curing through volume (24 hours): 2 mm @25°C/50%RH
- Painting time: 24 h
- Loss of volume: 45%
- Primerless adhesion to porous materials: concrete, bricks, wood
- Remains flexible for a long time after curing
- Shelf life of 12 months when stored in original containers at 5°C - 25°C

Product type	Size (ml/g)	Box Qty (pcs)	Colour	SAP	Languages on packaging
Acrylic sealant	280 ml	12	White	63642597401	EN, IT, ES, PT, TK, NL, FR, DE, PL

## PROPERTIES



### KEY FEATURES

Colour	White
Initial tack	Yes
Labelling	Non-toxic
Skin-time +25°C / 50% RH	30 - 60 minutes
Tooled, brushed within the Tack-free time	Yes
Curing through volume +25°C / 50% RH	2 mm / 24 hours
Painting time	24 hours
UV resistant	Yes
Exterior applications	No
Bonds to porous materials such as brick, concrete, wood and to metals	Yes

OneBond EasyNail	OneBond Acrylic Exterior	OneBond Acrylic Universal
Adhesive used to replace nails	High environmental resistance	For interiors Fills cracks
White	White	White
Yes	No	No
Non-toxic	Non-toxic	Non-toxic
30 - 60 minutes	15 - 45 minutes	25 - 60 minutes
Yes	Yes	Yes
2 mm / 24 hours	2 mm / 24 hours	2 mm / 24 hours
24 hours	24 hours	24 hours
Yes	Yes	Yes
No	Yes	No
Yes	Yes	Yes

## CERTIFICATIONS



OneBond EasyNail	OneBond Acrylic Exterior	OneBond Acrylic Universal
White	White	White

Not necessary since it is an adhesive



CE EN 15651-1:2012 F-EXT-INT-12.5P



CE EN 15651-1:2012 F-EXT-INT-12.5P




# POLYURETHANE SEALANTS

Wurtz discovered the reaction of isocyanates with alcohols to create esters of carbamic acid, named urethanes.

Slow introduction of PU construction sealants, hampered by technical problems.

Dramatic increase onward.

Introduction of waterborne systems.

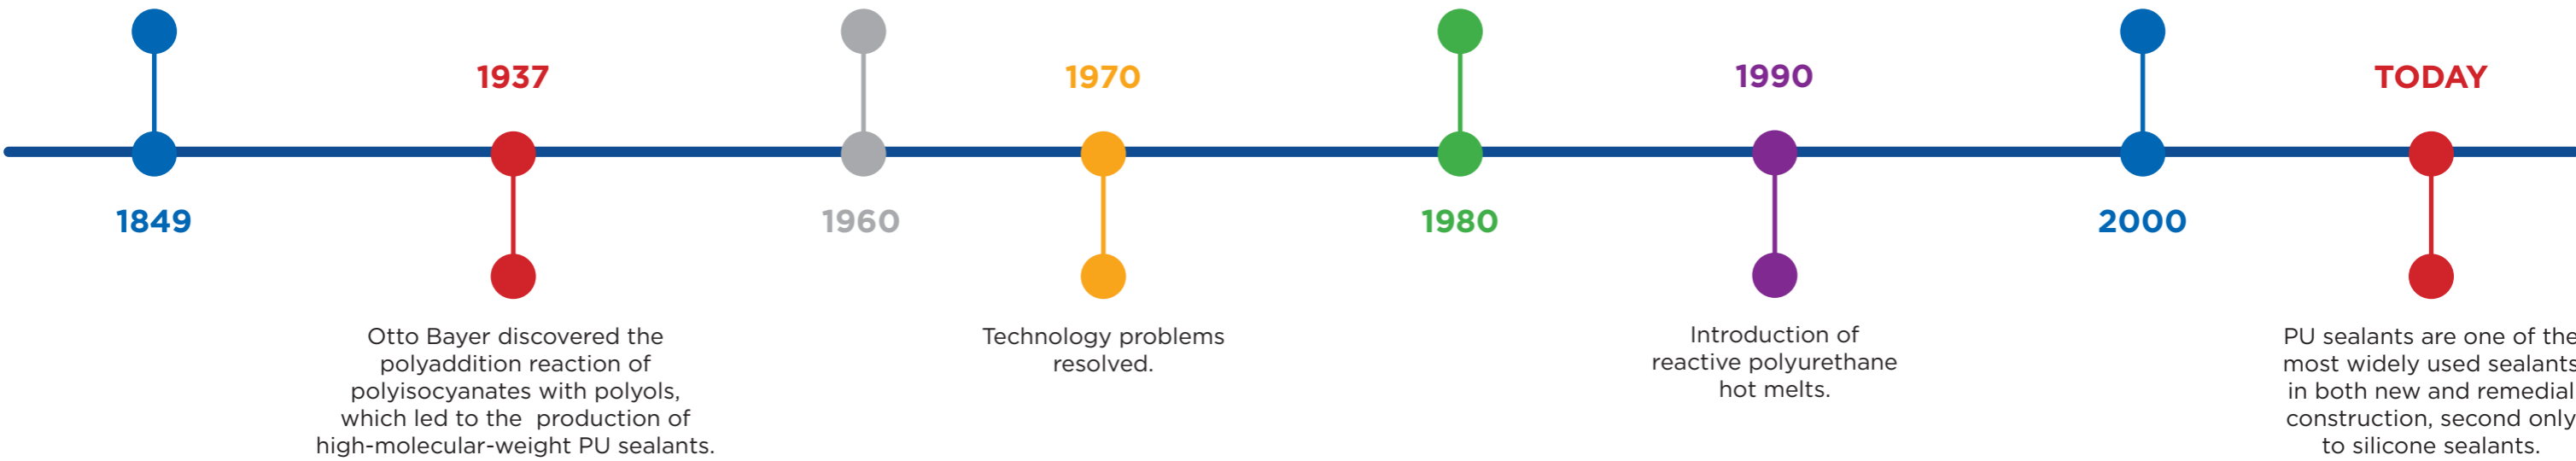



## PU40 SEALANT CARTRIDGES

OneBond PU40 sealant can be used to fill expansion joints and seal joints between concrete structures, brickwork, and masonry, for gutter sealing, roof tiles laying, assembling door/window framing components and sealing the perimeter, sealing metal roofs, cladding joints, balcony parapets, etc.

### PRODUCT HIGHLIGHTS

- Gun grade: very easy to apply and tool
- Application temperature: 5°C - 35°C
- Tack free time: 60 min
- Curing through volume (24 hours): 2 mm @25°C/50%RH
- Exhibits primerless adhesion to concrete, marble, glass, ceramic, bricks, steel, aluminium, thermoplastics, etc.
- Withstands/absorbs joint movements
- Permanent elasticity and resistance to weathering and ageing
- Temperature resistance: +80°C
- Shelf life of 12 months when stored in original containers at 5°C - 25°C

PAINTABLE



EXTENDS  
UP TO 500%



HUMIDITY  
RESISTANT



Product type	Size (ml/g)	Box Qty (pcs)	Colour	SAP	Languages on packaging
PU 40 Sealant	280 ml	12	White	63642597413	EN, TK, PL
PU 40 Sealant	280 ml	12	Grey	63642597414	EN, TK, PL
PU 40 Sealant	280 ml	12	Black	63642597415	EN, TK, PL



## PU40 SEALANT SOFT-PACK

OneBond PU40 sealant can be used to fill expansion joints and seal joints between concrete structures, brickwork, and masonry, for gutter sealing, roof tiles laying, assembling door/window framing components and sealing the perimeter, sealing metal roofs, cladding joints, balcony parapets, etc.

### PRODUCT HIGHLIGHTS

- Gun grade: very easy to apply and tool
- Application temperature: 5°C - 35°C
- Tack free time: 60 min
- Curing through volume (24 hours): 2 mm @25°C/50%RH
- Exhibits primerless adhesion to concrete, marble, glass, ceramic, bricks, steel, aluminium, thermoplastics, etc.
- Withstands/absorbs joint movements
- Permanent elasticity and resistance to weathering and ageing
- Temperature resistance: +80°C
- Shelf life of 12 months when stored in original containers at 5°C - 25°C

PAINTABLE



EXTENDS  
UP TO 500%



HUMIDITY  
RESISTANT



Product type	Size (ml/g)	Box Qty (pcs)	Colour	SAP	Languages on packaging
PU 40 Sealant	600 ml	12	White	63642597416	EN, TK, PL
PU 40 Sealant	600 ml	12	Grey	63642597417	EN, TK, PL
PU 40 Sealant	600 ml	12	Black	63642597418	EN, TK, PL



## PU SEAL 50 SEALANT

OneBond PU SEAL 50 is a one-part, moisture cured, solvent free polyurethane based sealant with Shore A 50. It has excellent adhesion to glass fibre reinforced plastics, thermoplastics, metals, coated metals, concrete, wood and glass. This product exhibits superior mechanical properties.

### PRODUCT HIGHLIGHTS

- Gun grade: very easy to apply and tool
- Application temperature: 5°C - 35°C
- Tack free time: 40 min
- Curing through volume (24 hours): 3,5 mm @25°C/50%RH
- Exhibits primerless adhesion to concrete, marble, glass, ceramic, bricks, steel, aluminium, thermoplastics (ABS, PC, PVC) etc.
- Withstands/absorbs joint movements
- Permanent elasticity and resistance to weathering and ageing
- Temperature resistance: +100°C
- Shelf life of 12 months when stored in original containers at 5°C - 25°C

PAINTABLE



EXTENDS  
UP TO 500%



HUMIDITY  
RESISTANT



Product type	Size (ml/g)	Box Qty (pcs)	Colour	SAP	Languages on packaging
PU SEAL 50 Sealant	310 ml	12	White	78072765586	EN, IT, ES, PT, TK, NL, FR, DE, PL
PU SEAL 50 Sealant	310 ml	12	Grey	78072765574	EN, IT, ES, PT, TK, NL, FR, DE, PL
PU SEAL 50 Sealant	310 ml	12	Black	78072768750	EN, IT, ES, PT, TK, NL, FR, DE, PL

## PROPERTIES



### KEY FEATURES

Colour	Grey, White and Black
Shore A	40
Skin-time +25°C / 50% RH	40 - 60 minutes
Odourless	No
Tooled, brushed within the Tack-free time	Yes
Curing through volume +25°C / 50% RH	2 mm / 24 hours
Painting time	From 2/3 hours to 24 hours
UV resistant	Yes
Exterior applications	Yes
Tensile Strength (ASTM D412C)	1 MPa
Elongation at break (ASTM D412C)	550 %

### OneBond PU 40 Sealant

#### For expansion joints

Grey, White and Black
40
40 - 60 minutes
No
Yes
2 mm / 24 hours
From 2/3 hours to 24 hours
Yes
Yes
1 MPa
550 %

### OneBond PU SEAL 50

#### High modulus Fast curing

Grey, White and Black
50
30 - 50 minutes
Yes
Yes
3 mm / 24 hours
From 2/3 hours to 24 hours
Yes
Yes
3 MPa
480 %

## CERTIFICATIONS



### OneBond PU 40 sealant

Grey, White & Black

### OneBond PU SEAL 50


Grey, White & Black



EN 15651-1: F-EXT-INT-CC-25HM  
EN 15651-4: PW-EXT-INT-CC-25HM



# MS HYBRID SEALANTS

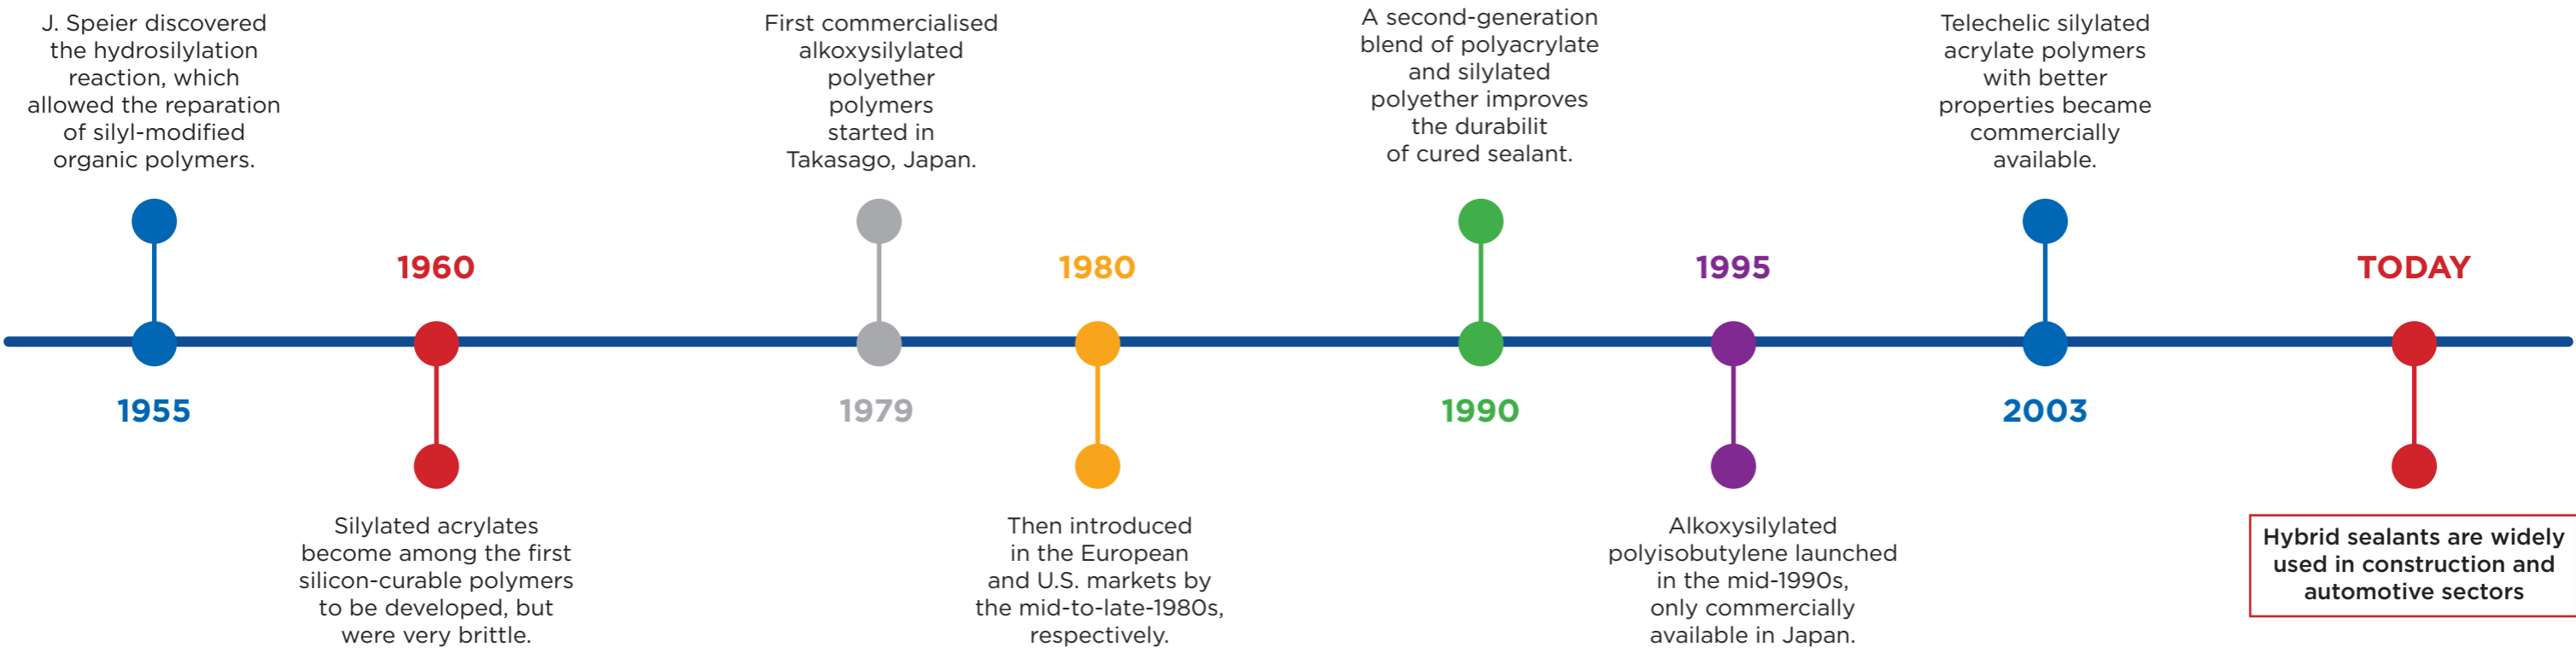



## MS HYBRID ULTRA-CLEAR

OneBond MS Hybrid Ultra Clear is a single-component, non-corrosive, silane terminated sealant and adhesive with crystal clear appearance. Suitable to repair mosaic tiles, fill glass-to-glass connection joints, fill leaks, seal windows, air vents, heating ducts, skirting boards, etc.

### PRODUCT HIGHLIGHTS

- Gun grade: very easy to apply and tool
- Application temperature: 5°C - 35°C
- Tack free time: 35 min
- Final strength: 200 Kg/m<sup>2</sup>
- Perfect for glass sealing in interiors (not mould resistant!)
- Excellent elasticity - does not shrink or crack over time
- Paintable with all types of paints (also water-based)
- Adheres to wet and damp surfaces
- UV resistant (non-yellowing)
- Shelf life of 12 months when stored in original containers at 5°C - 25°C



Product type	Size (ml/g)	Box Qty (pcs)	Colour	SAP	Languages on packaging
MS Hybrid Ultra-Clear	290 ml	12	Transparent	63642597421	EN, IT, ES, PT, TK, NL, FR, DE, PL



## MS HYBRID ULTRA-STRONG

OneBond MS Hybrid Ultra Strong is a single-component, non-corrosive adhesive with high instant adhesion suitable for mounting gutters, frame joints, mirrors, façade panels, sound insulating panels, fireproof panels, plywood, etc. It is faster and stronger than OneBond EasyNail Acrylic adhesive.

### PRODUCT HIGHLIGHTS

- Gun grade: very easy to apply and tool
- Application temperature: 5°C - 35°C
- Solvent free, non-corrosive and non-toxic
- Initial tack: 5 s
- Tack free time: 5 - 10 min
- Final strength: 300 Kg/m<sup>2</sup>
- Bonds well to aluminium, glass, wood, ceramic and concrete, even damp. Not suitable for PP, PE, Teflon, PC and acrylic
- Shelf life of 12 months when stored in original containers at 5°C - 25°C



Product type	Size (ml/g)	Box Qty (pcs)	Colour	SAP	Languages on packaging
MS Hybrid Ultra-Strong	290 ml	12	White	63642597420	EN, IT, ES, PT, TK, NL, FR, DE, PL



## MS HYBRID MULTI-PURPOSE

OneBond MS Hybrid Multi-Purpose is a single-component silane terminated adhesive and sealant that bonds well to stone, concrete, wood, steel, aluminium, tiles and plastics. Can be used for filling joints between façade panels, siding, roofing, sealing doors and windows, etc.

UV RESISTANT



HEAT  
RESISTANT



PAINTABLE



HUMIDITY  
RESISTANT



### PRODUCT HIGHLIGHTS

- Gun grade: very easy to apply and tool
- Application temperature: 5°C - 35°C
- Solvent and isocyanate free (white label) and non-corrosive
- Tack free time: 20 - 25 min
- Excellent weathering resistance (UV, humidity, temperature, etc)
- Excellent elasticity - does not shrink or crack over time
- Can be painted
- Adheres to wet and damp surfaces
- Shelf life of 12 months when stored in original containers at 5°C - 25°C

Product type	Size (ml/g)	Box Qty (pcs)	Colour	SAP	Languages on packaging
MS Hybrid Multi-Purpose	290 ml	12	White	63642597419	EN, IT, ES, PT, TK, NL, FR, DE, PL



## MS SEAL 50

OneBond MS Seal 50 is a moisture cured, UV-stable, hybrid sealant, suitable for horizontal and vertical applications. It is a multi-purpose product that can also be used for medium-strength bonding.

PAINTABLE



HEAT  
RESISTANT



HUMIDITY  
RESISTANT



### PRODUCT HIGHLIGHTS

- Gun grade: very easy to apply and tool
- Application temperature: 5°C - 35°C
- Solvent free, non-corrosive and non-toxic
- Tack-free time of 20 min for fast sealing, short painting time
- Shore A 50
- Superior mechanical properties
- Can withstand temperatures of up to +100°C
- Bonds well to aluminium, steel, coated metals, glass, wood, ceramic and concrete, even damp - not suitable for PP, PE, Teflon, PC and acrylic based substrates.
- Shelf life of 12 months when stored in original containers at 5°C - 25°C

Product type	Size (ml/g)	Box Qty (pcs)	Colour	SAP	Languages on packaging
MS SEAL 50	290 ml	12	Grey	78072765575	EN, IT, ES, PT, TK, NL, FR, DE, PL

PROPERTIES



KEY FEATURES

	OneBond MS Hybrid Multi-Purpose	OneBond MS Hybrid Ultra-Clear	OneBond MS Hybrid Ultra-Strong	OneBond MS SEAL 50
	Multimaterial	Clearer than silicone	Mounting adhesive	Multimaterial Fast curing
Colour	White	Transparent	White	Grey
Initial tack	No	No	Yes, 5 s	No
Labelling	Non-toxic	Non-toxic	Non-toxic	Non-toxic
Tack-free time +25°C / 50% RH	20-25 minutes	30-40 minutes	5-10 minutes	20 minutes
Tooled, brushed within the Tack-free time	Yes	Yes	Yes	Yes
Can be applied underwater	Yes	Yes	Yes	Yes
Elongation at break	250%	300%	350%	300%
Paintable	Yes	Yes	Yes	Yes
Exterior applications	Yes	Yes	Yes	Yes
Bonds to porous materials such as brick, concrete, wood and to glass and metals	Yes	Yes	Yes	Yes

CERTIFICATIONS



OneBond MS Hybrid Multi-Purpose	OneBond MS Hybrid Ultra-Clear	OneBond MS Hybrid Ultra-Strong	OneBond MS SEAL 50
White	Transparent	White	Grey



Not necessary since it is an adhesive



# INSTANT BOND ADHESIVES (CYANOACRYLATES)






## ONEBOND 754 INSTANT ADHESIVE

OneBond 754 is a non-sagging, general purpose gel with high bond strength formulated to provide flexibility for vertical and angled applications. It is designed to bond porous and acidic substrates such as foams, wood, paper, leather and fabrics, and non-porous substrates such as metals and thermoplastics. It's medium setting speed enables parts to be adjusted during application. Transparent and easy to use. Does not bond to low surface energy plastics, such as polyethylene and polypropylene.

### PRODUCT HIGHLIGHTS

- Fixture time on steel and aluminium 10-50s, 20-90s on thermoplastics and 10-60s on wood
- Ideal for filling gaps up to 0.25mm
- Can withstand temperatures of up to +80°C
- Shelf life of 12 months when stored in original conditions

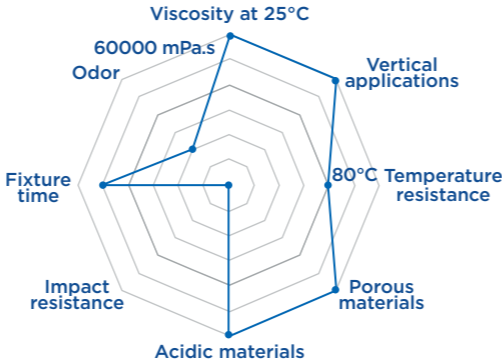

Viscosity	Size (ml/g)	Box Qty (pcs)	Colour	SAP	Languages on packaging
Gel	20g	10	Clear	78072764216	EN, IT, ES, PT, TK
Gel	20g	10	Clear	78072764217	EN, NL, FR, DE, PL




## ONEBOND 793 INSTANT ADHESIVE

OneBond 793 is a general purpose, medium viscosity instant adhesive recommended for bonding porous, non-porous and acidic substrates including all types of wood, chipboard, cork and paper made products. It can also bond foam, metals, thermoplastics, leather and ceramics. It is resistant up to +120°C thanks to cross linking agents. Does not bond to low surface energy plastics, such as polyethylene and polypropylene.

### PRODUCT HIGHLIGHTS

- Fast fixture time on steel, aluminium and thermoplastics (2-10s) and on wood (10-60s)
- Can withstand temperatures of up to +120°C
- Shelf life of 12 months when stored in original conditions

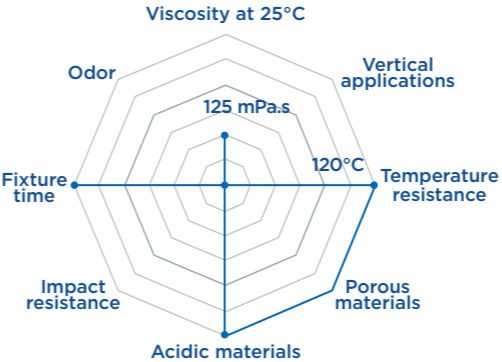

Viscosity	Size (ml/g)	Box Qty (pcs)	Colour	SAP	Languages on packaging
Medium	20g	10	Clear	78072764203	EN, IT, ES, PT, TK
Medium	20g	10	Clear	78072764204	EN, NL, FR, DE, PL

# APPLICATOR GUNS



## AS01 - PNEUMATIC GUN CART & BAG 1K OP34A

Hand-held, professional pneumatic gun for applying 290/310ml standard cartridges and 300/400 ml sachets. Made of metal. Pressure reducer integrated.

### PRODUCT HIGHLIGHTS

- Pneumatic gun without piston
- Recommended for applying medium viscosity sealants
- Connection: ¼ male gas
- Weight 1.072 g.
- Working pressure : 4-8 bar
- OneBond OP34A gun is CE marked: it is in conformity with all the relevant requirements at EU level
- Users manual included.

Product type	Box Qty (pcs)	Colour	SAP
Pneumatic gun	1	Black	63642599995



## AS01 - PNEUM GUN CART&BAG 1K OP34PI

Hand-held, professional pneumatic gun for applying 290/310ml standard cartridges, 300/400 ml sachets and two component products packed in coaxial cartridges. Made of metal.

### PRODUCT HIGHLIGHTS

- No risk for the cartridge to enter in contact with the air.
- Connection: ¼ male gas
- Working pressure : 4-8 bar
- Weight 1.416 g.
- OneBond OP34PI is CE marked: it is in conformity with all the relevant requirements at EU level
- Users manual included.

Product type	Box Qty (pcs)	Colour	SAP
Pneumatic gun	1	Black	63642599990



## AS01-MANUAL GUN CART & BAG 1K OM340-18

Hand-held, professional manually operated applicator gun for applying one component products and two component products packed in coaxial cartridges. Made of metal.



### PRODUCT HIGHLIGHTS

- Ring nut made of aluminum
- Suitable for 290/310 ml cartridges and 400 ml sachets
- Recommended for applying medium viscosity sealants
- Thrust ratio: 18:1, hence not suitable for dispensing structural adhesives packed in coaxial cartridges (1:1 & 2:1).
- Maximum force: 450 Kgf - 4.412 N
- Progress/Stroke: 4,5 mm
- Weight: 840 g

Product type	Box Qty (pcs)	Colour	SAP
Manual gun	1	Black & Brushed steel	77696097769

## AS01-MAN GUN CART&BAG 1K OM346JL-20

Manual gun specially designed for the extrusion of one component sealants and adhesives from low to medium viscosity. To be used with products contained in 300ml/400ml/600ml soft bags and in standard 300ml/310ml cartridges.



### PRODUCT HIGHLIGHTS

- Thrust ratio: 20:1
- Weight 690 g.
- Material-holding tube: Aluminum to control the extrusion of the product.
- Clutch: Forged steel
- Push rod: Galvanized Carbon steel
- Leve: Stamped steel.

Product type	Box Qty (pcs)	Colour	SAP
Manual gun	1	Black & Brushed steel	78072773587

# ONEBOND ADHESIVES AND SEALANTS

## FOR BONDS THAT LAST.



**SAINT-GOBAIN ABRASIVES**

Industrieweg 21  
9420 Erpe-Mere  
Belgium

Tel: +32 (0)2 267 21 00  
Fax: +32 (0)2 267 84 24

**Saint-Gobain Abrasives, s.r.o.**

Poernická 272/96, Malešice  
108 00 Praha 10  
Czech Republic

Tel: +420 255 719 326  
Fax: +420 255 719 321

**Saint-Gobain Abrasives A/S**

Dybendalsvænget 2  
DK-2630 Taastrup  
Denmark

Tel: +45 4675 5244

**PO Box 643706**

Fortune Tower office 2106  
JLT Block C (next to metro station)  
Jumeira Lake Tower, Dubai  
United Arab Emirates

Tel: +971 4 431 5154  
Fax: +971 4 431 5434

**Saint-Gobain Abrasifs**

251 Rue de l'Ambassadeur  
78700 Conflans  
France

Tel: +33 (0)1 34 90 40 00  
Fax: +33 (0)1 34 90 43 97

**Saint-Gobain Abrasives GmbH**

Birkenstraße 45-49  
D-50389 Wesseling  
Germany

Tel: +49 (0)2236 703-0  
Fax: +49 (0)2236 703-388

**Saint-Gobain Abrasives KFT.**

1225 Budapest  
Bányalég u. 60/B.  
Hungary

Tel: +36 1 371 22 50  
Fax: +36 1 371 22 55

**Saint-Gobain Abrasivi S.p.A**

Via per Cesano Boscone 4  
I-20094 Corsico Milano  
Italy

Tel: +39 02 44 851  
Fax: +39 02 44 78 266

**Saint-Gobain Abrasives S.A.**

190 rue J.F. Kennedy  
L-4930 Bascharage  
Grand Duché de Luxembourg

Tel: +352 50 40 11  
Fax: +352 50 16 33  
No. Vert (France) 0800 906 903

**Saint-Gobain Abrasifs, S.A.**

2 allée des Figuiers  
Ain Sebaâ - Casablanca  
Morocco

Tel: +212 5 22 66 57 31  
Fax: +212 5 22 35 09 65

**Saint-Gobain Abrasives BV**

Groenloseweg 28  
7151 HW Eibergen  
P.O. Box 10  
7150 AA Eibergen  
The Netherlands

Tel: +31 545 466466  
Fax: +31 545 474605

**Saint-Gobain Abrasives AS**

Karihaugveien 89  
1086 Oslo  
Norway

Tel: +47 63 87 06 00  
Fax: +47 63 87 06 01

**Saint-Gobain HPM Polska Sp. z o.o.**

ul. Norton 1  
62-600 Kolo  
Poland

Tel: +48 63 26 17 100  
Fax: +48 63 27 20 401

**Saint-Gobain Abrasivos, L. da**

Zona Industrial da Maia  
I-Sector VIII, No. 122  
Apartado 6050  
4476 - 908 Maia  
Portugal

Tel: +351 229 437 940  
Fax: +351 229 437 949

**Saint-Gobain Glass**

Business Unit Abrasivi  
Punct de Lucru: loc.Vetis,  
jud. Satu Mare  
447355, str. Careiului 11,  
Parc Industrial Renovatio  
Romania

Tel: 0040 261 839 709  
Fax: 0040 261 839 710

**Saint-Gobain Africa**

300 Janadel Ave  
Halfway Gardens  
Midrand, 1686  
South Africa

Tel: +27 (0) 12 657 2800  
Fax: +27 (0) 11 388 1605  
www.saint-gobain-africa.com

**Saint-Gobain Abrasivos, S.A**

Ctra. De Guipúzcoa, km. 7,5  
E-31195 Berrioplano (Navarra)  
Spain

Tel: +34 948 306 000  
Fax: +34 948 306 042

**Saint-Gobain Abrasives AB**

Gårdsfogdevägen 18A  
SE-168 66 Bromma  
Sweden

Tel: +46 8 580 881 00  
Fax: +46 8 580 881 30

**Saint-Gobain Inovatif Malzemeler**

ve Aşındırıcı San. Tic. A.Ş.  
Gold Plaza, Altay Çeşme  
Mahallesi,  
Öz Sokak, No:19/16  
34843 Maltepe-İstanbul,  
Turkey

Tel: 0090-216-217 12 50  
Fax: 0090-216-442 40 74

**Saint-Gobain Abrasives**

Unicorn House  
Unit 1, Amison Close  
Redhill Business Park  
Stafford  
ST16 1WB  
United Kingdom

Tel: +44 1785 279553  
Fax: +44 1785 213487

**Saint-Gobain Surface Solutions**

251 rue de l'Ambassadeur  
78700 Conflans  
France

Tel: +33 1 34 90 41 40



**VISIT OUR WEBSITE**  
**onebondadhesives.com**

**FOR INFO: Onebond.support@saint-gobain.com**



**YouTube 'OneBond'**  
**Facebook 'Onebond.uk'**  
**Instagram 'Onebond.uk'**